



RN Cable gland for non armoured cable


Protection mode:

Type of protection: Ex e II Ex d IIc Ex tD Ex e I Ex d I
 Protection degree: IP66 / 68*
 Zones : 1-2-21-22
 Certificates: INERIS 06 ATEX 0014X
 IECEX INE 10.0010 X
 POCC IT.A 45.B04931 RTN





Description:

RN, ATEX Cable gland for non armoured cable for gas (1&2) and dust zones (21&22).

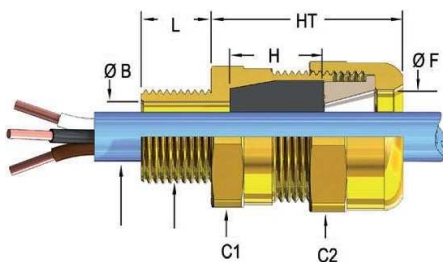

Make the product reference :

1 + 2 + 3 + 4 + 5 + 6



3 4

5	EP: EPDM	6	ON: Nickel plated Brass
			S6: Stainless steel AISI316L

*on request

1	2	3	Cylindrical threads			Conic thread			Weight (g)	øF	HT	H	C1		C2	
			ISO 262	ISO 228	DIN 40430	UNI 6125	NPT	ISO7								
RN	16	4 ÷ 7	M16x 1.5	3/8"	Pg11	1/2"	3/8"	3/8"	94	16	38	20	24	26	24	26
		7 ÷ 10														
RN	20	5.5 ÷ 8	M20x 1.5	1/2"	Pg13.5	1/2"	1/2"	1/2"	156	20	40	20	30	33	32	35
		8 ÷ 10.5														
		10.5 ÷ 13														
RN	25	8 ÷ 10.5	M25x 1.5	3/4"	Pg16	3/4"	3/4"	3/4"	185	25	40	20	35	38	36	39
		10.5 ÷ 13														
		13 ÷ 15.5														
		15.5 ÷ 18														
RN	32	13 ÷ 15.5	M32x 1.5	1"	Pg21	1"	1"	1"	340	32	52	25	42	47	45	49
		15.5 ÷ 18														
		18 ÷ 21														
		21 ÷ 24														
RN	40	21 ÷ 24	M40x 1.5	1"1/4	Pg 29	1"1/4	1"1/4	1"1/4	421	38	52	25	48	53	50	55
		24 ÷ 27														
		27 ÷ 30														
RN	50	24 ÷ 27	M50x 1.5	1"1/2	Pg36	1"1/2	1"1/2	1"1/2	537	44	52	25	55	60	57	62
		27 ÷ 30														
		30 ÷ 33														
		33 ÷ 36														
RN	63	36 ÷ 39	M63x 1.5	2"	Pg42	2"	2"	2"	749	54	52	25	68	74	67	72
		39 ÷ 42														
		42 ÷ 45														
RN	75	45 ÷ 48	M75x 1.5	2"1/2	Pg48	2"1/2	2"1/2	2"1/2	1085	65	52	25	80	86	80	88
		48 ÷ 51														
		51 ÷ 54														
RN	90a	54 ÷ 58	M90x 2	3"	/	3"	3"	3"	2125	74	67	30	100	107	100	107
		58 ÷ 62														
	90b	60 ÷ 64														
		64 ÷ 68														