



EXAP2700_4A - Access point enclosure 4 WIFI antennas 5GHz


Protection mode:

Type of protection:	2G Ex d IIB
Class of temperature:	T5
Protection degree:	IP65
Ambient Temp :	-20/+40°C
Zones :	1-2



Access point **Cisco® Aironet® 2700** enclosure permit connection by radio to your WIFI networks (5GHz frequency) on your hazardous area environments.

Reference:

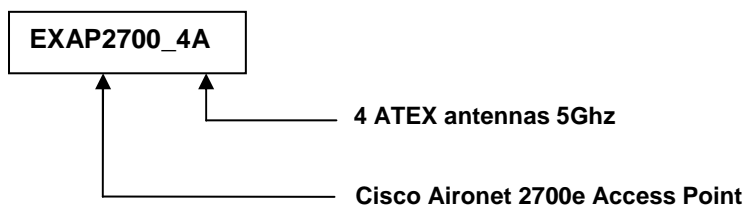

Furniture:

Housing	CCF7G, ATEX 2G Ex d IIB IP65 enclosure (ext. dim 400x500x200mm)
Antennas	3 x ATEX Ex d antennas 2.4Ghz WIFI (CTM-5000-TR) + cable Antennas are omni-directional with 2.0 dBi gain. Max power 2W
Cable entries	2 entries: 1 nickel plated brass cable gland size ½" NPT unarmoured (+kit seal 5.5 to 13mm) 1 plug ½"
Inside	Cisco Aironet 2700e Access Point

***Cisco Aironet 2700e Access Point: Indoor environments, with external antennas**
AIR-CAP2702E-x-K9: Dual-band, controller-based 802.11a/g/n/ac

***Note 1:** Customers are responsible for verifying approval for use in their individual countries. To verify approval and to identify the regulatory domain that corresponds to a particular country, visit <http://www.cisco.com/go/aironet/compliance>
Regulatory domain 'E' supply in standard on list link above.

***Note 2:** Access point mounted at customer's charge. Take care to mount access point by a professional.



EXAP2700_4A - Access point enclosure 4 WIFI antennas 5GHz

Input power requirements

- AP2700: 44 to 57 VDC
- Power supply and power injector: 100 to 240 VAC; 50 to 60 Hz

Power draw

- AP2700: 15W

Powering options

- 802.3at PoE+
 - Enhanced PoE
 - Cisco AP2700 power injectors (AIR-PWRINJ4=)
 - Cisco AP2700 local power supply (AIR-PWR-B=)
- NOTA: If 802.3af PoE is the source of power, the access point will dynamically shift from 3x4 to 3x3 and come up under PoE.

IEEE standards

- IEEE 802.11a/b/g, 802.11n, 802.11h, 802.11d
- IEEE 802.11ac Draft 5

Security

- 802.11i, Wi-Fi Protected Access 2 (WPA2), WPA
- 802.1X
- Advanced Encryption Standards (AES), Temporal Key Integrity Protocol (TKIP)

Extensible Authentication Protocol (EAP) types:

- EAP-Transport Layer Security (TLS)
- EAP-Tunneled TLS (TTLS) or Microsoft Challenge Handshake Authentication Protocol Version 2 (MSCHAPv2)
- Protected EAP (PEAP) v0 or EAP-MSCHAPv2
- EAP-Flexible Authentication via Secure Tunneling (FAST)
- PEAP v1 or EAP-Generic Token Card (GTC)
- EAP-Subscriber Identity Module (SIM)



Interfaces

- 2x10/100/1000BASE-T autosensing (RJ-45)
- Management console port (RJ-45)

Indicators

Status LED indicates boot loader status, association status, operating status, boot loader warnings, boot loader errors

Dimensions (W x L x H)

Access point 221 x 221 x 51 mm

Environmental Cisco Aironet 2700e

- Non-operating (storage) temperature: -30° to +70°C
- Non-operating (storage) altitude test: 25°C, 15,000 ft.
- Operating temperature: -25° to +50°C
- Operating humidity: 10% to 90% percent (noncondensing)
- Operating altitude test: 40°C, 9843 ft.

System memory

- 512 MB DRAM
- 64 MB flash